

GPS

STANDARD

Committed to security.

PERIMETER



PERIMETER PROTECTION RADAR 077GHZ





RADAR 077

77GHZ ELECTROMAGNETIC WAVE SYSTEM

The **new Radar 077** is a patented perimeter protection system ideal for safeguarding small and medium-sized industrial, commercial, and residential sites. It uses electromagnetic waves at a frequency of 77GHz to establish **impenetrable security**.

VERSIONS

The Radar 077 comes in two versions: **Radar 077 Wide**, with 90° opening, and **Radar 077 Blade**. Both versions guarantee the

highest performances in any kind of application.

OPERATION

In the **Wide version**, the Radar 077 creates a sensitive area with a **radius of 40 metres and a 90° aperture**. Up to 4 separate, identified and freely configurable alarm zones and 4 exclusion zones can be created within this area. The alarm event only occurs when the target moving within the sensitive area enters one of the

programmed alarm zones.

In the **Blade version**, on the other hand, the Radar 077 creates a **60-metre long sensitive corridor**, featuring a crossing median line, a one-metre pre-alarm zone to the left and a one-metre pre-alarm zone to the right of the median line. An alarm is generated only when the target physically crosses the median line, passing from one pre-alarm zone to the other. Up to three separate,

freely configurable alarm zones can be programmed within this sensitive corridor.

ADVANTAGES

- RADAR 077 Blade and Wide systems are **not affected by atmospheric events**, and small animals can be easily classified and identified.

- **New machine learning and deep learning algorithms** can track and classify each target according to volume, speed and behaviour, thus distinguishing

between small animal, human target, motor vehicle etc.


- Thanks to **Cross Point Technology**, the use of Minimum Redundancy - **MIMO** (Multiple Input Multiple Output) technology, and the presence of a multitude of transmitting and receiving devices, the new Radar 077 detects all targets with **an accuracy of 20 centimetres defining the intrusion point**, in all weather and lighting conditions.

- By exploiting the range of


frequencies available, the **77GHz frequency** allows for up to 20 times the performance in field resolution and accuracy compared to standard 24GHz microwave barriers, enabling the simultaneous detection and **tracking of up to 16 targets**.



The Radar 077 Blade creates a very narrow barrier with a width consisting of a crossing line and two one-metre wide pre-alarm areas, one to the right and one to the left of the crossing line, with a maximum range of 60 metres..

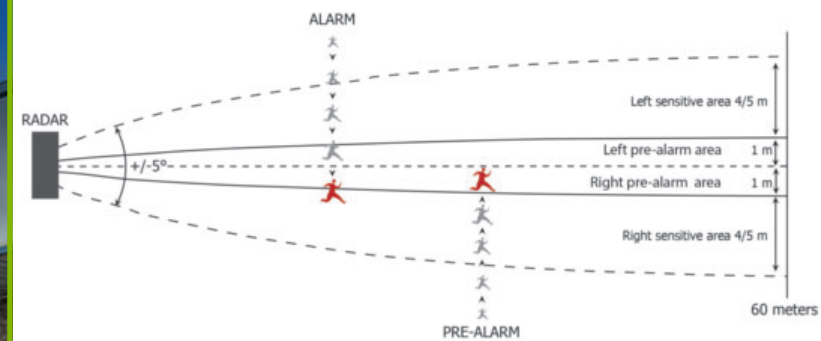


The Radar 077 Wide creates a sensitive volumetric area with a radius of 40 metres on the 3db line (90°).

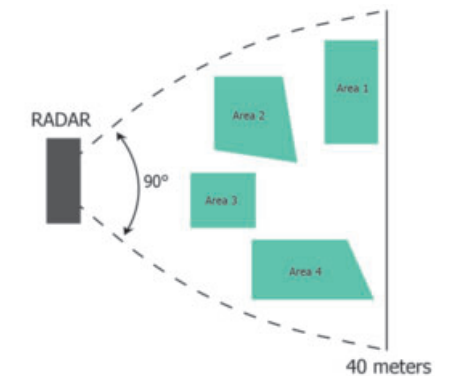

TECHNICAL SPECIFICATIONS

Frequency	77 GHz
Horizontal detection field	Radar 077 Blade: 5°~10° / Radar 077 Wide: 90°
Angulation accuracy	±0,35°
Horizontal spatial resolution (person)	0,5 m
Vertical detection range	±7,5°
Detection range (person)	Radar 077 Blade: 0÷60 m / Radar 077 Wide: 0÷40 m
Distance accuracy	± 20cm
Spatial resolution in distance (person)	0,5 m
Minimum detection speed	± 0.01 m/s
Maximum detection speed	Radar 077 Blade: ± 5,68/8,52 m/s Radar 077 Wide: ± 5,68 m/s
Accuracy of detection speed	± 0.01 m/s
Data update speed	10 Hz
Maximum number of tracked objects	16
Object classification	Unknown, Animal, Person, Vehicle
Crossing lines	Radar 077 Blade: 3 / Radar 077 Wide: 4
Exclusion Area	4
Outputs	6 Relè (NO/NC)
Supply voltage	12Vdc & PoE
Absorbed power	6W
Communication interface	Ethernet RJ45 10/100
Network Protocols	TCP/UDP/DHCP/NTP MODBUS TCP/IP
Compatible with	Web relè board art. PUA-R008

Retailer partner



Committed to security.

GPS STANDARD SRL

Fraz. Arnad Le Vieux, 45/C • 11020 Arnad (AO) - Italy • Ph. +39 0125 96 86 11 • Fax +39 0125 96 60 43
info@gps-standard.com • www.gps-standard.com

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001:2015 =

COMPANY WITH
ENVIRONMENTAL SYSTEM
CERTIFIED BY DNV GL
= ISO 14001:2015 =

COMPANY WITH
SAFETY MANAGEMENT SYSTEM
CERTIFIED BY DNV GL
= ISO 45001 =



Copyright by GPS Standard Srl

The rights of translation, reproduction or complete or partial amendment, by any means, are reserved in all countries.

GPS Standard reserves the right to modify the technical characteristics and prices without prior notice.

The information provided in this document is subject to modification and/or errors.

For detailed information refer to GPS Standard.